



POSTHOLE

# RADIAN


MINIMUM SIZE, MAXIMUM RANGE, UNRIVALLED VERSATILITY

QUICK START GUIDE

# RADIAN POSTHOLE

## Initial Hardware Setup

Power cable (with bare ends), GPS receiver, GPS cable and Ethernet cable are supplied with the Minimus Accessory Pack. Analogue and digital sensor cables are supplied with the respective sensors. No power supply is included.

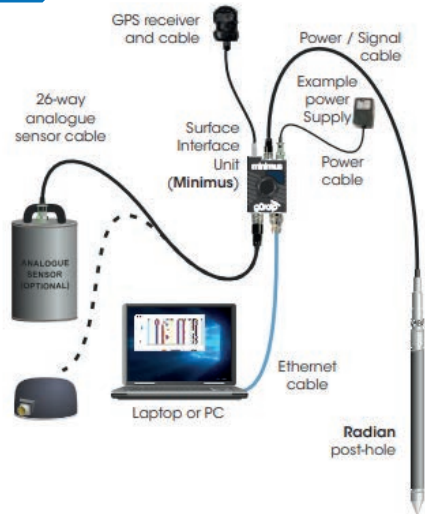

1

Connect all the hardware using the cables supplied, as shown above.

2

Switch on the power supply (12-36 V DC). The LED indicator on the Minimus will behave as shown in the table.


LED Flash	Status
WHITE flashing rapidly	Booting-up (10-20s)
Quick RED flash followed by a 1s pause	Removable microSD present, no fixed microSD card
2 quick RED flashes followed by a 1s pause	Fixed microSD present, no removable microSD
3 quick RED flashes followed by a 1s pause	MicroSD cards present, missing or poor GPS
GREEN flash every 4s	MicroSD cards and GPS all OK (may take up to 10min)

## Güralp Discovery Software


Download Güralp Discovery from:


<https://guralp.com/sw/download-discovery.shtml>

(Please contact [support@guralp.com](mailto:support@guralp.com) for other operating systems)

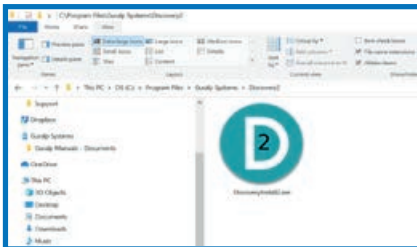

Run the installer that you have downloaded, follow the on-screen instructions to install and then launch Discovery.

If you see a dialogue from Windows Firewall saying that it has “blocked some features of this app”, select one or more networks from the list provided and then click .

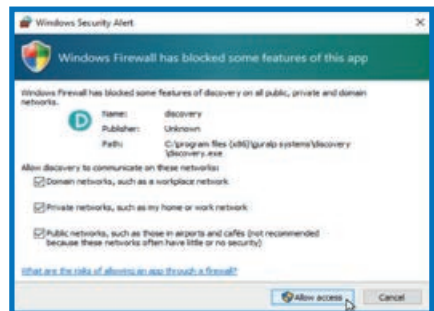


Ensure that your version of Discovery is up to date. To do this, in Discovery, click on the **Help** menu and select. Click on the Update button and follow the on-screen instructions.

Launch Discovery software. The serial number (as shown on the base of the Minimus) should appear in the main window. If the instrument does not appear, check your Ethernet connection and then press the **Scan Locally** button (more troubleshooting details in Minimus user's manual in section 4.1). Right-click the instrument and select **Live View** then **GDI**.

The Live View window will open and start streaming all available data from the Radian. Streams can be added or removed from the viewer using the **Channel List** panel on the left-hand side. Amplitude and time zoom/pan can be controlled using the keyboard arrow-keys or the mouse-wheel.

## Instrument Status

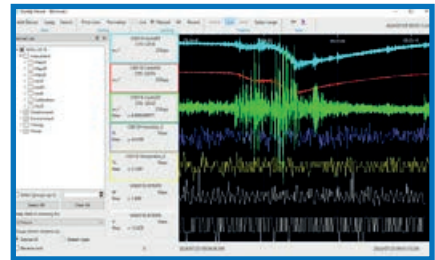

To configure the Radian system (view instrument state-of-health information, configure station metadata and network preferences, manage data storage and data flow), right-click on the Minimus in Discovery's main window and select **View Web Page**.

## Next Steps

For detailed information on usage, control and configuration of the Radian, Güralp highly recommends first reading the **Minimus Manual MAN-MIN-0001**:

[www.guralp.com/documents/MAN-MIN-0001](http://www.guralp.com/documents/MAN-MIN-0001)

Followed by the **Radian Manual MAN-RAD-0001**:

[www.guralp.com/documents/MAN-RAD-0001](http://www.guralp.com/documents/MAN-RAD-0001)

It may also be important to update firmware on the Minimus - refer to Section 5.18 of MAN-MIN-0001 for more details.



## GüVü App

**GüVü** is an app for monitoring the state of health of Güralp seismic instrumentation. It is available for Android:



<https://play.google.com/store/apps/details?id=com.guralp.whisper>

[illegible]



Güralp Systems Limited  
Midas House  
Calleva Park  
Aldermaston  
Reading  
RG7 8RA  
United Kingdom

T +44 1189 819066  
F +44 1189 819943  
E sales@guralp.com  
E accounts@guralp.com  
E admin@guralp.com  
E support@guralp.com  
www.guralp.com

## Quality Certificate

It is hereby certified that the product identified below has been fully tested and calibrated in accordance with the Güralp Quality Assurance Program.

It is further certified that any product designed and manufactured by Güralp Systems Ltd is carried out in accordance with the applicable Original Manufacturer Approvals.

The Güralp Quality Management System has been assessed and is certified to meet the requirements of ISO 9001:2015 for the design and manufacture of low noise Broadband Seismometers, Accelerometers, Digitisers and associated networking equipment.

All our calibrated reference equipment is certified by an independent test laboratory, and in compliance with the international standard ISO/IEC 17025:2005.

Certificate Serial Number:

Product Serial / BatchNo:

Final Quality Approval:

Date of Issue:

Notes

Güralp Systems Limited  
Midas House  
Calleva Park  
Aldermaston  
Reading  
RG7 8EA  
United Kingdom

T +44 118 981 9056  
F +44 118 981 9943  
E [sales@guralp.com](mailto:sales@guralp.com)

[www.guralp.com](http://www.guralp.com)

MSH-RAD-0001 Issue I